
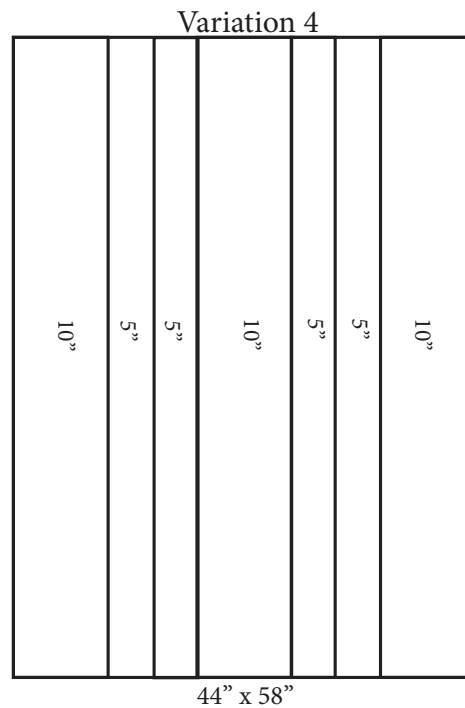
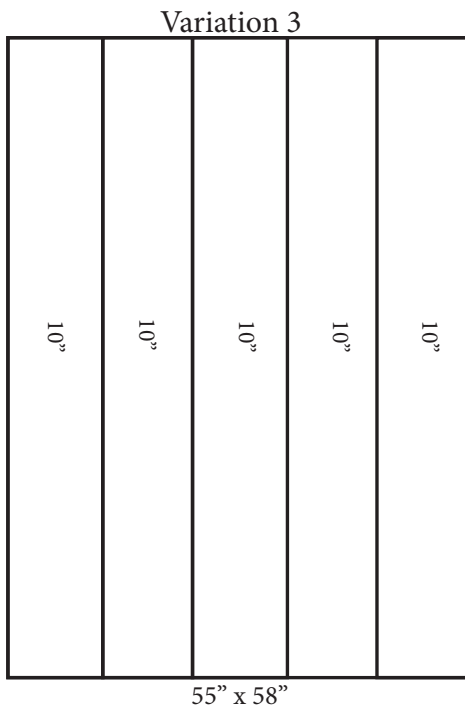
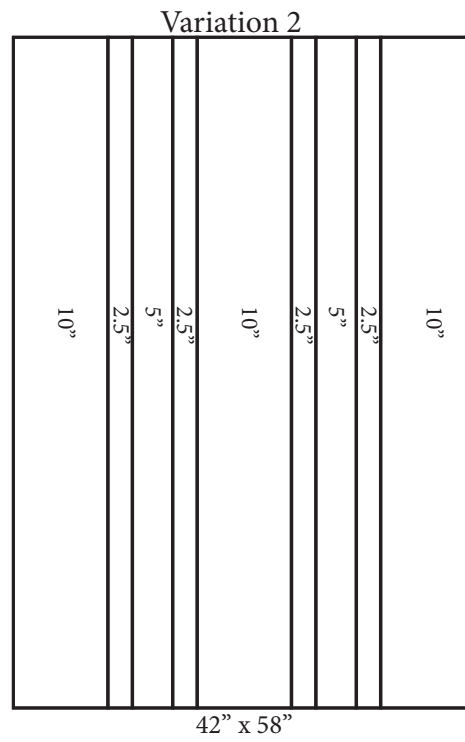


Fabulous 5s

Fabulous 5 quilts are made with five (5) 10" strips. Each variation requires different cutting specifications; each sub-cut shown in the layouts is from the precut 10" strips.

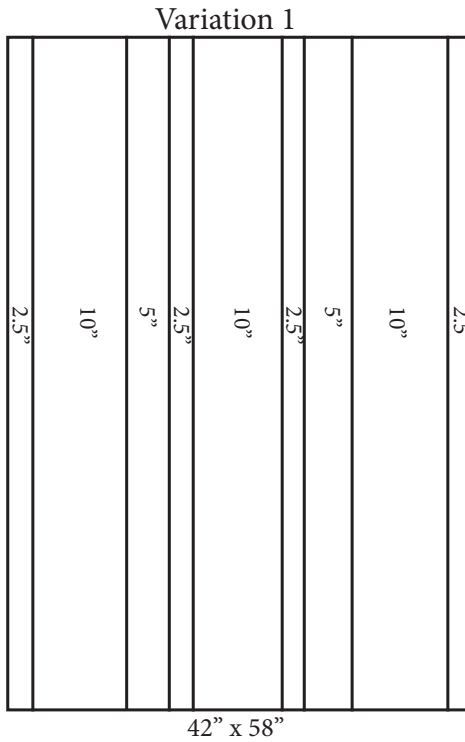

Fabulous 5s

Finished Size: 42" x 58" to 55" x 58"
(varies by layout choice)

Choose from a variety of layout options using five 10" strips to create a quilt you'll love! Decide on your layout (four options shown on reverse) and subcut the strips as desired, then sew using the Stitch-and-Flip method.

Supplies

- Five (5) 10" x WOF (width of fabric) strips
- Four (4) 1 3/4" x WOF strips for binding
- 56" x 59" backing piece
- 56" x 59" piece of batting
- 90/14 Stretch sewing machine needle
- Quilt basting spray/temporary spray adhesive
- Flower head pins and Wonder Clips® (optional)
- Walking foot or even-feed foot (optional)
- Freezer or parchment paper (optional)
- Basic sewing supplies: rotary cutter, mat, thread

Cutting

- Cut strips into the various width as desired for layout. *See reverse for layout options.*
- For more accurate measuring of strips, use acrylic ruler and cut from reverse side of Cuddle®.

Basting

- Put cloth or newsprint on table to protect surfaces from overspray when spray-basting backing and strips.
- Use basting spray sparingly; a light spritz will be enough to hold fabrics in place.

Sewing

- *Refer to the enclosed Stitch and Flip handout for detailed instructions on constructing your quilt.*
- Lengthen your stitch length to 4.0mm or 8 stitches per inch.
- Use a 90/14 stretch needle to avoid skipped stitches.
- Use pins to hold the fabrics in place as you sew.
- Sew a straight stitch with a 1/2" seam allowance on all seams.
- Sew slowly along each strip, stitching through all layers (strips, batting and backing).

Binding

- *Refer to the enclosed Binding with Cuddle® handout for detailed instructions on binding your quilt.*
- We recommend using Wonder Clips® or pins to hold binding around raw edge as you sew.
- Sew with a 1/2" seam allowance.
- Sew slowly, removing clips or pins as you reach each one.
- You can sew binding to back and bring around to front or vice versa, if preferred.
- Set your machine to a wide and long zig zag or serpentine for topstitching raw edge binding in place.

 Shannon
F A B R I C S

Making The World A Softer Place™